


H07Z-R 单芯无护套绞合硬导体交联聚乙烯绝缘布线

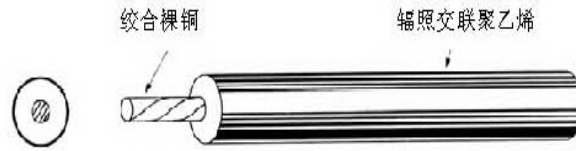

Description	说明
<ul style="list-style-type: none"> ● Rate temperature: 90°C ● Rate voltage: 450/750V ● Standard: DIN VDE 0282-9:2007-12;HD22.9 S3:2007 ● Class2 requirement given in EN 60228 ● The insulation shall be a polyolefin cross-linked material T₁ type EI 5 to EN 50363-5 	<ul style="list-style-type: none"> ● 额定温度：90°C ● 额定电压：450/750V ● 参考标准：DIN VDE 0282-9:2007-12;HD22.9 S3:2007 ● 导体使用标准 EN60228 中要求的第二类导体 ● 绝缘材料使用符合标准 EN50363-5 的 EI5 型要求的交联聚乙烯

Application	应用
General-purpose type electrical appliances, equipment Internal fixation wiring	一般用途类电器、设备内部固定布线

No. 编号	Conductor 导体结构		绝缘厚度		MAX.COND.RESISANCE 最大导体直流电阻 (Ω/Km,20°C, DC)	APPROX WEIGHT 参 考重量 (Kg/Km)
	规格 (mm ²)	CONSTRUCYION 结构 (NO./mm)	THICKNESS 厚度 (mm)	O.D. 外径 (mm)		
HR01150	1.5	7/0.52	0.7	3.05 ± 0.15	12.1	21.5
HR01250	2.5	7/0.68	0.8	3.70 ± 0.15	7.41	35.8
HR01400	4.0	7/0.851	0.8	4.30 ± 0.25	4.61	49.8
HR01600	6.0	7/1.04	0.8	4.90 ± 0.25	3.08	73.5
HR01A00	10	7/1.35	1.0	6.10 ± 0.30	1.83	119.6
HR01A60	16	7/1.70	1.0	7.20 ± 0.30	1.15	182.3
HR01B50	25	7/2.13	1.2	9.20 ± 0.50	0.727	289.6