


# H05Z-U 单芯无护套实心导体交联聚乙烯绝缘布线

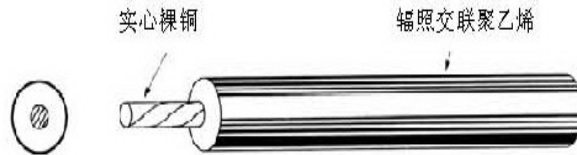

Description	说明
<ul style="list-style-type: none"> <li>● Rate temperature: 90°C</li> <li>● Rate voltage: 300/500V</li> <li>● Standard: DIN VDE 0282-9:2007-12;HD22.9 S3:2007</li> <li>● Class1 requirement given in EN 60228</li> <li>● The insulation shall be a polyolefin cross-linked material T,type EI 5 to EN 50363-5</li> </ul>	<ul style="list-style-type: none"> <li>● 额定温度：90°C</li> <li>● 额定电压：300/500V</li> <li>● 参考标准：DIN VDE 0282-9:2007-12;HD22.9 S3:2007</li> <li>● 导体使用标准 EN60228 中要求的第一类导体</li> <li>● 绝缘材料使用符合标准 EN50363-5 的 EI5 型要求的交联聚乙烯</li> </ul>

Application	应用
General-purpose type electrical appliances, equipment Internal fixation wiring	一般用途类电器、设备内部固定布线

No. 编号	Conductor 导体结构		绝缘厚度		MAX.COND.RESISANCE 最大导体直流电阻 (Ω/Km,20°C, DC)	APPROX WEIGHT 参 考重量 (Kg/Km)
	规格 (mm <sup>2</sup> )	CONSTRUCYION 结构 (NO./mm)	THICKNESS 厚度 (mm)	O.D. 外径 (mm)		
H501050	0.5	1/0.8	0.6	2.0 ± 0.15	36	8.5
H501075	0.75	1/0.97	0.6	2.2 ± 0.15	24.5	11.5
H501100	1.0	1/1.13	0.6	2.35 ± 0.15	18.1	14.6